



UVS - Transparent Screen
Highest Transparency In Among Same
Pixel Pitch Products


2020.11.12 V1.0

Unilumin

Stock Code : 300232

DISPLAY A GLORIOUS WORD AND LIGHT UP A HAPPY LIFE

Advantages



High Transparency:
Over 85%



Wide Viewing Angle:
Up to 140°



High Brightness:
Up to 5000cd/m²



High Refresh
3840HZ



Multi Sizes:
1000×500, 500×500
(Customizable)



Anticollision Lamp:
PC mask+Side view structure,
anticollision Lamp

Main Application Scenes



► Shopping Center——

Glass Wall 、 Atrium 、 Glass Elevator、 Glass Railing
Let through the daylight, Keep the original spatial structure;
Turn the atrium glass wall, glass railing, glass elevator into
transparent screen; Innovative and unique 3D scenery for the
commercial atrium.

► Chain Store——

Customer Electronics, Bank Hall , Coffee Shop Window ,
Jewelry Store Window

Onsite retail display window media screen

Let through the daylight, keep the original design

Multi-media creative interaction, gather customer and boost sales



► Advertising Media——

Railway Station , Metro , Bus Station

Turn the glass wall, display window, interior space, etc. into
screen that has visual impact and better advertising value,
without affecting the daylighting and design.

► Stage Decoration——

Tourism Landscape , Stage Decoration , Bar&Pub

Naked-eye 3D visual effect


Can be set up anywhere on the stage, will not keep out the
lighting and sight, creates immersive image



Specification

Item	UVS Transparent Screen	
Pixel Pitch	P3.9-7.8mm	P10.4-10.4mm
Pixel Density	32768pixels/m ²	9216pixels/m ²
Cabinet Size(WXH)	1000*500mm	1000*500mm
Cabinet Resolution	256*64	96*48
Transparency	≥82%	85%
Brightness	5500cd/m ²	5000cd
Viewing Angle	H140°, V140°	H140°, V140°
Driving Mode	1/11	1/2
Material	Industrial PC	Industrial PC
Cabinet Weight	7kg	7kg
Grey Scale	16bit	16bit
Refresh Rate	≥3840HZ	≥3840HZ
Frame Rate	60fps	60fps
Input Voltage	100~240	100~240
Power Consumption(Max/Aver.)	800/220W/m ²	800/220W/m ²
Screen Weight	14kg	14kg
Lifespan	≥100,000 hrs	≥100,000 hrs
IP Grade	IP40	IP40
Temperature	-20°C~+60°C	-20°C~+60°C
Maintenance	rear	rear
Installation	hanging, fixed	hanging, fixed


System configuration

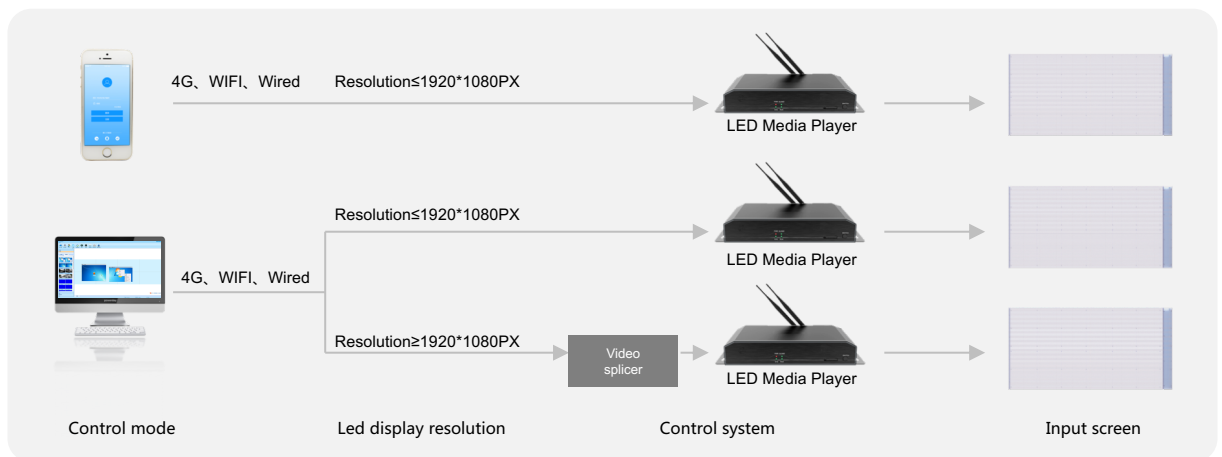

部分案例：



* Shopping Center Glass Wall* Suzhou * UVS15.6 * 294m²

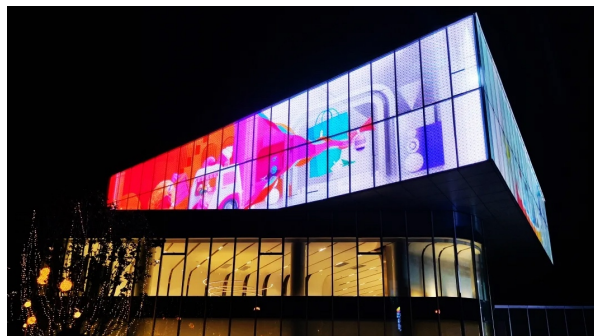

* Shopping Center Glass Wall * Tianjin * UVS15.6 * 680m²



* Shopping Center Atrium* guanzhou * UVS3.9 * 404m²



* Shopping Center Atrium * Chengdu * UVS10.4 * 500m²



* Chain Store Display Window* Adidas * UVS3.9 * 12m²



* Chain Store Display Window * Osaka * UVS3.9 * 16m²



* Advertising Media Transportation Hub* Zhuhai * UVS3.9 * 216m²



* Advertising Media Transportation Hub * Shenzhen * UVS3.9 * 36m²