



E SERIES

PRODUCT MANUAL

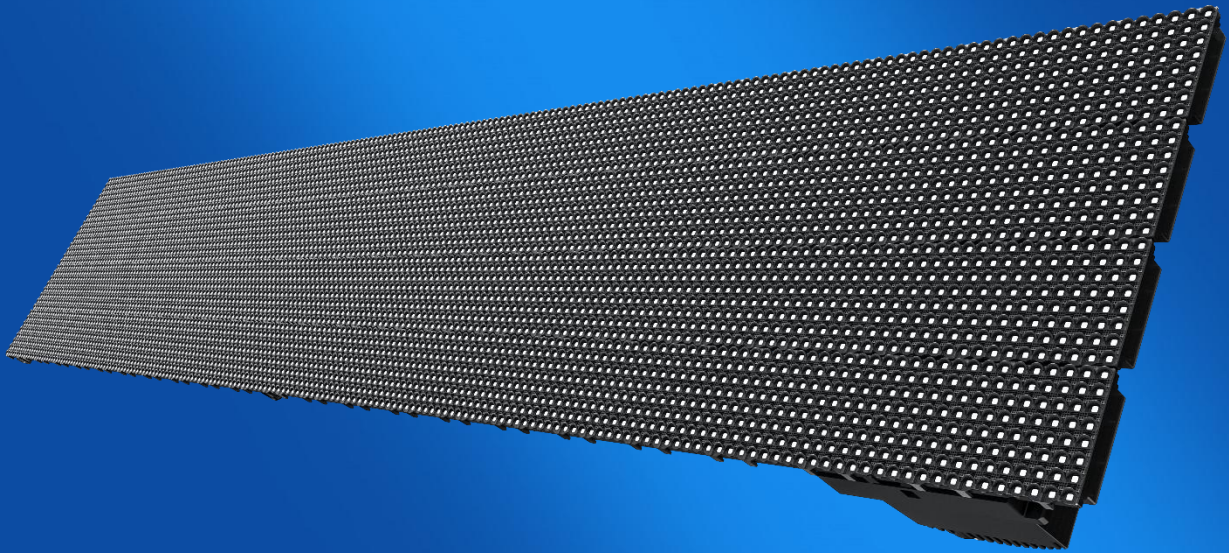

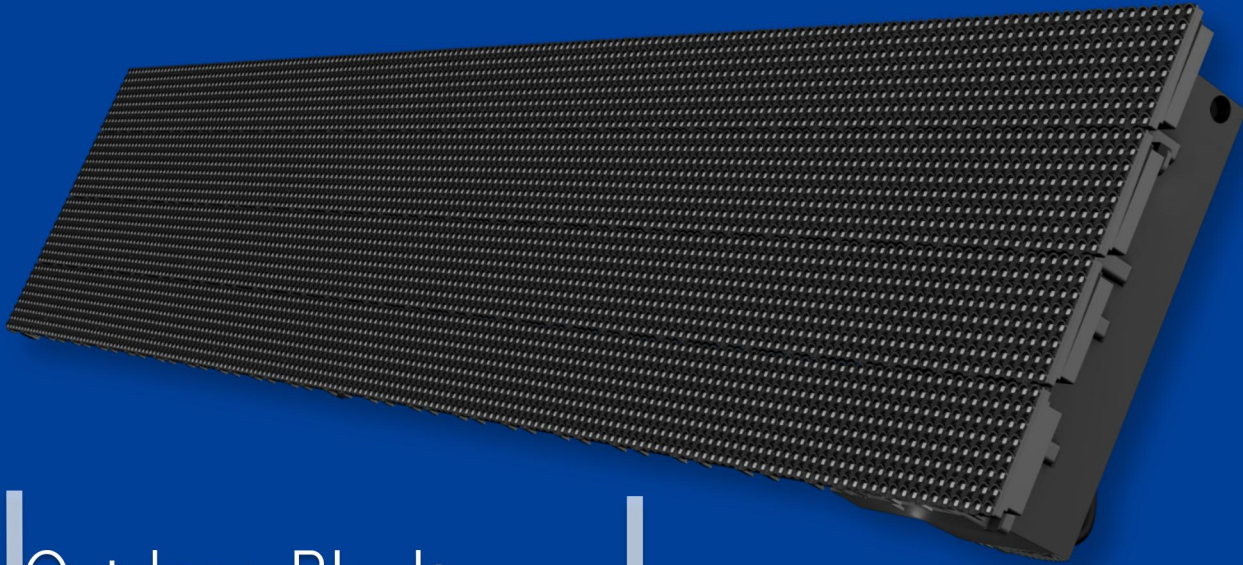

Outdoor Plank

E Series | E-8C

2021-V1.0



LIGHT Lightweight

21kg/m², easy for installation and maintenance



NO STEEL No Steel Structure

No steel structure is needed for building façade



FRONT FIX Front Service

Front or rear installation, greatly improved the ability to adapt different installation conditions.



IP67 High Protection

The very first IP67 product in this industry, dramatically lengthen the lifespan.



ALL-WEATHER 24hrs/7days

Work stably under -30°C~60°C, wind resistance design.



SELF-COOLING Self Cooling


Full aluminum body, hollow out design for heat dissipation.

Specs

Model No.	E-8C (Standard)
LED	SMD 2727 Standard Brightness R \geq 580mcd, G \geq 1350mcd, B \geq 330mcd
Material	Aluminum Profile & PC mask (customizable color)
Pixel Pitch	8 mm /8 mm
Pixel Density	15625 dot/m ²
Direction	Horizontal Vertical
Unit Size	1408 × 256 mm (Horizontal) 256 × 1408 mm (Vertical) (Length can be customized according to project requirement)
Resolution/Unit	176 × 32 dots (Horizontal) / 32 × 176 dots (Vertical)
Brightness	4000–5000 nit
Viewing Angle	(H)120° × (V)120°
Weight	21 kg/m ²
Input Voltage	AC 110 –240 V
Max. Power	790 w/m ²
Installation	Front & Rear
Protection	IP67
Grey Scale	RGB 16384 Colors (3 × 14bit)
Refresh Rate	\geq 1920 Hz
Frame Rate	\geq 60 Hz
Temperature	Temperature: -30°C to +60°C; Humidity: 10%–90%
Control System	JV-M JV-C






※ Specs could be modified according to different project

Appearance

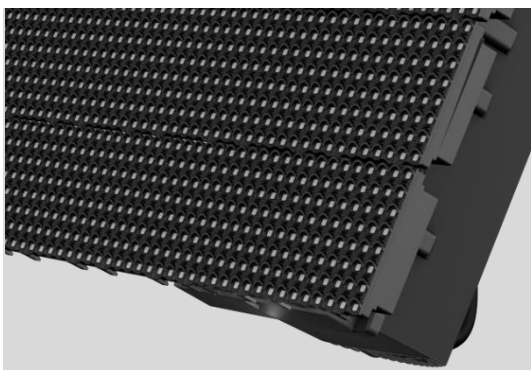

单元尺寸

1408mm (Customizable Length)

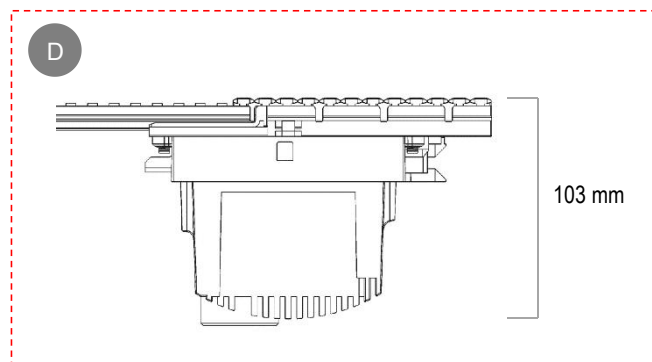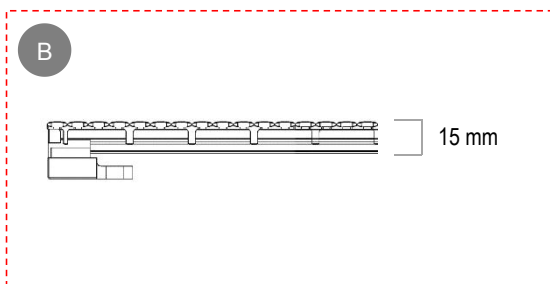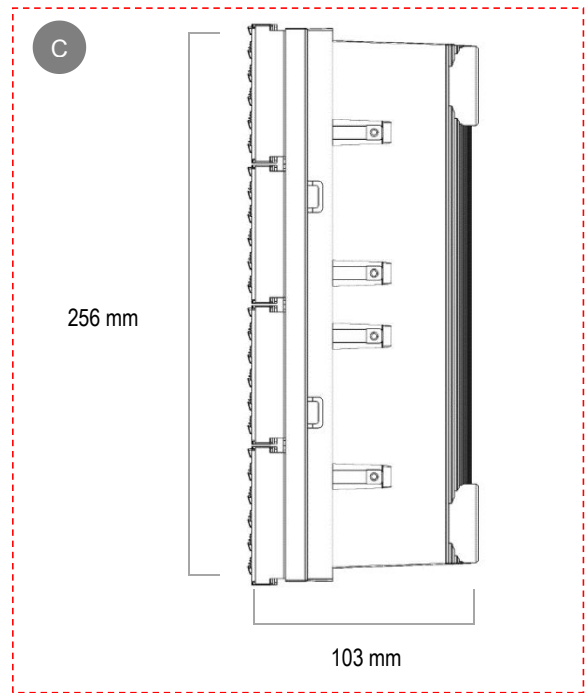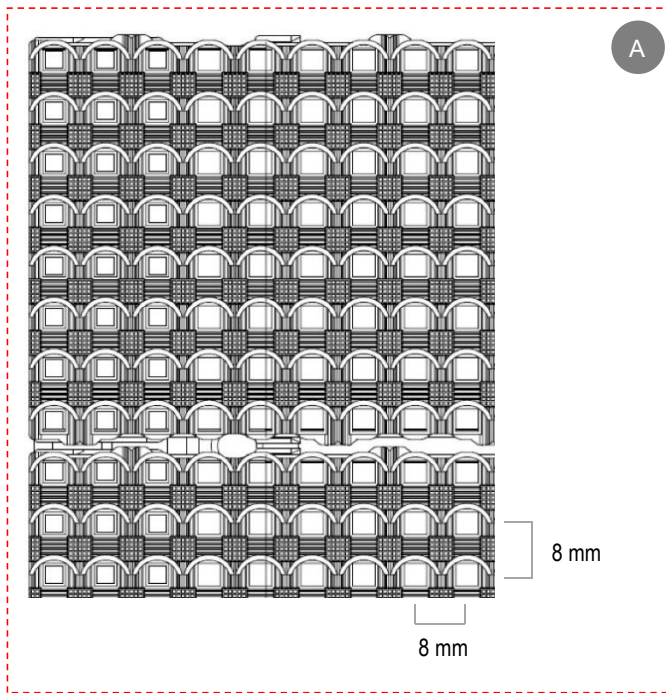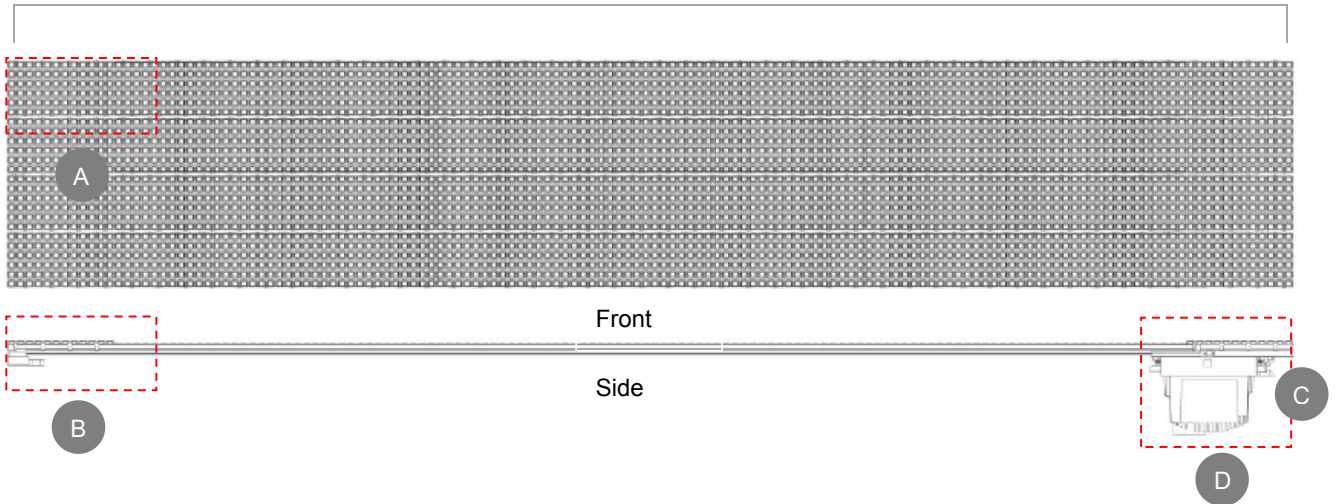

Cases



Jin Zhai Theme Park

Area: 288 m² Date: 05.2018 Location: Anhui Province, China



Star-Avenue-Mall

Area: 1005 m² Date: 11. 2017 Location: Jeddah, Saudi Arabia

Unilumin
洲明文创 | JOYWAY

SHENZHEN UNILUMIN JOYWAY TECH CO., LTD